



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

REC'D 26 NOV 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080270.8

Best Available Copy

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



Anmeldung Nr:
Application no.: 02080270.8
Demande no:

Anmeldetag:
Date of filing: 13.12.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

High pressure discharge lamp

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01J61/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

High pressure discharge lamp

The present invention relates to a high pressure discharge lamp, comprising a lamp vessel made of a transparent ceramic material, enclosing a discharge space comprising an ionizable discharge medium and at least two electrodes, each provided with an electrode tip, which are spaced apart at a mutual distance d , and electrical lead-through elements which
5 extend from the electrodes to the exterior.

A high pressure discharge lamps of the type as described above is known from, for example, US 6,307,321. Drawbacks of these known lamps reside in that the
10 required distance between the electrode tips in the discharge space generally limits the efficacy of the known lamps in projection application.

It is an object of the invention to provide a small high pressure mercury vapor
15 discharge lamp that approximates a point light source and, which is for example very useful for applications such as data/TV projection.

This is achieved by the present invention by providing a high pressure discharge lamp of the kind mentioned in the opening paragraph, wherein the distance d between the electrode tips is less than 1.0 mm and the mercury density in the vessel is higher
20 than 0.3 mm^3 . Preferably and in relation with the mentioned mercury density range the mercury vapor pressure during operation is higher than 35 Mpa (350 bar). According to the present invention it has surprisingly been found that by using ceramic as the material for the lamp vessel, for example yttrium aluminium garnet (YAG), mercury vapor pressures during operation of over 35 Mpa (350 bar) can be achieved, as a result of which the distance
25 between the electrode tips can be significantly reduced while maintaining the same lamp voltage.

According to the present invention, it has been found that at a working pressure of over 35 Mpa (350 bar) the red part of the emitted light spectrum is significantly increased. In addition, as a consequence of the very small distance between the electrode tips,

the lamp according to the invention approximates a point light source. Thus, the lamp of the invention is very well suited to be used for projection purposes, e.g. for the projection of images created by a liquid crystal display (LCD) and beamers. The lamp according to the invention can further very suitably be used in projection TV and home cinema, due to its improved colour spectrum.

In a preferred practical realization of the lamp according to the invention, the distance d between the electrode tips ranges from 0.3 to 0.8 mm, more preferably from 0.3 to 0.6 mm, thus further approaching a point light source. Due to the shorter arc smaller LCD screens and simpler optical systems can be used, which contribute to the cost saving aspects of the lamp according to the present invention.

According to a further advantageous embodiment of the present invention the mercury density in the vessel ranges from 0.3 to 0.8 mg/mm³, more preferably from 0.4 to 0.7 mg/mm³. The cold spot temperature in the lamp vessel is preferably in the range of 1200-1500 K in order to obtain the high mercury pressures of the lamp according to the invention, which depends on both the mercury density and the cold spot temperature. When a cold spot temperature of at least 1250 K is achieved to evaporate all filled mercury, i.e. to obtain an unsaturated mercury pressure.

In a suitable embodiment of the invention the lamp vessel comprises a bulging section, enclosing the discharge space and communicating with at least two lead-through channels having a diameter smaller than the bulging section, wherein the electrical lead-through elements are closely fitted. In the lamp according to this embodiment an overheated area is prevented. Moreover, the temperature gradient in the lamp vessel and thus the thermal stress is small, and the lead-through section has little impact on the lamp vessel.

Advantageously, the bulging section is cylindrical over the distance d and has a cross-sectional diameter D_i ranging from 1.5 to 4.5 mm and a length L ranging from 4 to 8 mm.

Lamps having a power in the range of 30 to 150 W have been tested, but the lamp according to the invention is expected to be able to operate also at higher powers. However, preferably the wall load on the inside of the vessel during operation ranges from 40 to 150 W/cm². The outer wall load will be approximately 20 to 80 W/cm² thereby.

In the context of the present application the term ceramic material is understood to relate to metal oxides, such as sub-micro polycrystalline aluminium (PCA), yttrium aluminium garnet (YAG), Y₂O₃, MgAl₂O₄, as well as metal nitrides, for example aluminium nitride (AlN).

The lamp according to the present invention is designed for direct coupling of power into the discharge vessel by DC/AC discharge by means of the electrical lead-through elements that extend from the electrodes to exterior of the discharge vessel. Moreover, the lamp of the present invention allows for filling the discharge vessel with mercury and buffer gas first, and then sealing the vessel with frit glass (i.e. a mixture of glass and crystals), filling the space between the feed-through and the vessel.

The electrical lead-through elements may each comprise a respective part which is highly resistant to halides, for example molybdenum. Niobium may for example be used as an external conductor in view of its attractive coefficient of expansion. The electrodes may for example be formed of tungsten.

The discharge medium of the lamp according to the invention comprises for example mercury and a buffer gas comprising for example argon or xenon. In addition, as a measure to avoid wall blackening by tungsten evaporated from the electrodes, the high pressure discharge lamp according to the invention preferably contains a small quantity of at least one of the halogens chlorine, bromine or iodine. These halogens create a tungsten transport cycle by which the tungsten evaporated is transported back to the electrodes. Preferably, in the lamp according to the invention the halogen used is bromide.

The lamp of the invention may be used for several types of lighting apparatuses, such as headlights for cars and image projection apparatuses. Accordingly, the invention further relates to a lighting apparatus comprising a main body and at least a lamp according as described above.

The present invention will further be illustrated by the embodiments described hereafter with reference to the accompanying figure.

Fig. 1 is a schematic view of the lamp according to the present invention.

Figure 1 shows a schematic view of a high pressure discharge lamp 1 comprising a lamp vessel 2 made of a transparent ceramic material with a wall thickness w enclosing a discharge space 3, containing an ionizable discharge medium comprising for example mercury and a suitable buffer gas. Within the discharge space 3 a pair of electrodes, 4,5 is arranged, which are facing each other and are provided with electrode tips 4a,5a at a mutual distance d , between which a discharge extends when the lamp is in operation. The

electrodes are connected to electrical lead-through elements 6,7 which extend to the exterior. According to the embodiment as shown in Fig. 1, the lamp vessel 2 has a bulging section 8 enclosing the discharge space 3 which is cylindrical at least over the distance d having an cross-sectional diameter D_i .

5 As shown in Fig. 1, the lamp vessel 2 has a ceramic wall and is formed of a one-piece bulging section 8, with cross-sectional diameter D_i and length L and elongated lead-through channels, 10, 11 in which the lead-through elements 6,7 are closely fitted. The ceramic material is transparent at least in the area of the discharge space 3. The electrode tips are spaced apart at a mutual distance d , which in a practical realization of the invention
10 ranges from 0.3-0.8 mm.

A suitable gastight connection between the lead-through element and the channel wall of the lead-through channel is formed for example by a ceramic glass comprising Al, Si and Dy oxides.

The lamp according to the invention may also be surrounded by a gas-filled
15 outer envelope (not shown).

EXAMPLES

EXAMPLE 1

20 In a further experiment 8 lamps were made with a YAG lamp vessel with a diameter D_i of 3.4 mm, a length L of 6 mm, and wall thickness of 0.7 mm. The distance d between electrode tips was 0.5-0.6 mm. The burner was filled with 0.6 mg/mm³ mercury, and reached 50 W, with an estimated pressure of 60 Mpa (600 bar). All lamps worked well and no explosions were observed after 10 switches.

25

EXAMPLE 2

A lamp with the following characteristics was made:

Material:	YAG
Discharge medium:	0.4 mg/mm ³ Hg
30 Diameter D_i :	3.6 mm
Wall thickness:	0.5 mm
Length L :	7.0 mm
Distance d :	0.8 mm

With this lamp, burning in vertical position, a working pressure of 41 Mpa was reached, with a power of 50 W, voltage of 105 V and current of 0.15 A.

CLAIMS:

1. High pressure mercury vapor discharge lamp, comprising a lamp vessel made of a transparent ceramic material, enclosing a discharge space comprising an ionizable discharge medium and at least two electrodes, each provided with an electrode tip, which are spaced apart at a mutual distance d , and electrical feed-through elements which extend from
5 the electrodes to the exterior, characterized in that the distance d between the electrode tips is less than 1.0 mm and the mercury density in the vessel is higher than 0.3 mg/mm^3 .
2. Lamp as claimed in claim 1, characterized in that the distance between the
10 electrode tips ranges from 0.3 to 0.8 mm.
3. Lamp as claimed in claim 1 or 2, characterized in that the distance between the
electrode tips ranges from 0.3 to 0.6 mm.
- 4 Lamp as claimed in claim 1, 2 or 3, characterized in that the mercury density
15 in the vessel ranges from 0.3 to 0.8 mg/mm^3 .
5. Lamp as claimed in claim 1, 2 or , characterized in that the mercury density in
the vessel range from 0.4 to 0.7 mg/mm^3 .
- 20 6. Lamp as claimed in any of the preceding claims, characterized in that the lamp
vessel comprises a bulging section communicating with at least two feed-through channels
having an inner diameter smaller than the bulging section.
7. Lamp as claimed in claim 6, characterized in that the bulging section is
25 substantially cylindrical over the distance d and has an internal cross-sectional diameter D_i
ranging from 1.5 to 4.5 mm and a length L ranging from 4 to 8 mm.
8. Lamp as claimed in claim 6 or 7, characterized in that the wall load on the
inside of the vessel during operation ranges from 40 to 150 W/cm^2 .

9. Lamp as claimed in any of the preceding claims 1-8, characterized in that the ceramic material is chosen from the group consisting of sub-micro polycrystalline aluminium (PCA), yttrium aluminium garnet (YAG), Y_2O_3 , $MgAl_2O_4$, Aluminium nitrite (AIN).
- 5
10. Lighting apparatus, comprising a main body and at least a lamp as described in any of the claims 1-9.

ABSTRACT:

High pressure mercury vapor discharge lamp (1), comprising a lamp vessel (2) made of a transparent ceramic material, enclosing a discharge space (3) comprising an ionizable discharge medium and at least two electrodes (4,5), each provided with an electrode tip (4a, 5a), which are spaced apart at a mutual distance d , and electrical feed-through elements (6,7) which extend from the electrodes (4,5) to the exterior, wherein the distance d between the electrode tips (4a,5a) is less than 1.0 mm and the mercury density in the vessel (2) is higher than 0.3 mg/mm^3 .

Fig. 1

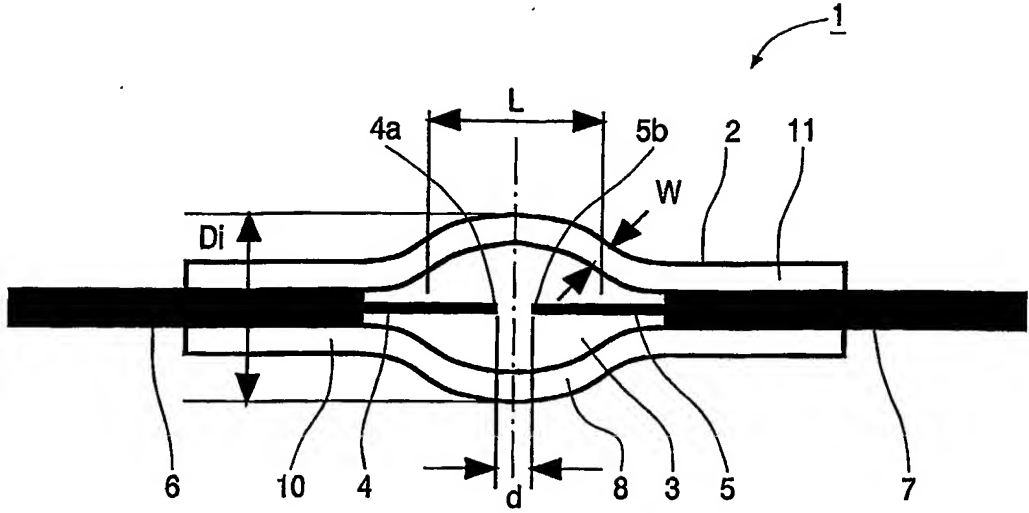


FIG.1

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.